



Clifton 5 Wide Multifuel Kit

User Guide


Installing the grate

Lift the grate out of the box and remove all packaging. Drop the grate into the base of the stove on top of the firebricks. Position the ash pan underneath, between the legs of the grate. Safely store the operating tool outside the stove.

Riddling the grate

To riddle the grate, carefully open the stove door. Wearing heat resistant gloves, locate the riddle lever and move the lever left to right until the ash bed has been reduced and sunk into the ash pan.

Caution! Take care to avoid ash from falling out of the firebox and in front of the stove, as this could be a fire risk.

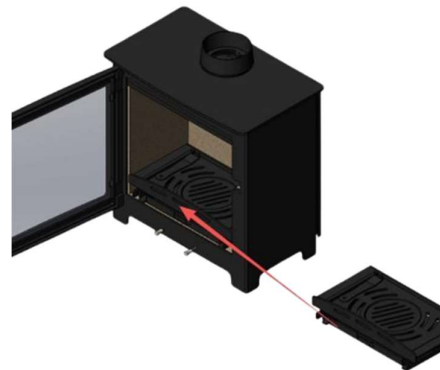

Removing ash

The ash pan should be emptied when the ash level reaches the top of the ash pan. DO NOT allow ash build up to reach the underside of the grate, as this will significantly reduce the lifespan of the product.

To remove the ash pan, always use the glove and operating tool.

Carefully open the door of the stove. Insert the fork end of the operating tool into the ash pan and carefully pull the ash pan from the stove.

Empty the ash into a metal container. Replace the ashpan inside the stove and close the stove door.

Caution! Ash can be very hot! Always wear heat resistant gloves and take care to prevent ash from falling out of the ashpan. Only ever empty ash into a metal container as it may be very hot and contain burning or smouldering embers, which are a fire and injury risk.