

Farrington Small Eco



Farrington Small Eco shown in Spice red with optional colour-matched log store

The Farrington range epitomises the finest of British design with innovative technology, exceptional heat control and a generously-proportioned viewing glass.

Farrington stoves are Ecodesign Ready so they are cleaner burning and have fantastic fuel efficiency. This is a stylish option for heating any energy-conscious home.

Dimensions

Width	495 mm
Height	638 mm
Depth	362 mm
Ideal log length	360 mm



Farrington Small Eco



Optional wooden handle


Features

- Lifetime guarantee
- Better than Ecodesign standards when burning wood or solid fuel
- Multiple colour options
- Approved for use in Smoke Control Areas
- Stainless steel ash pan and throat plate
- Top or rear flue fitting
- Direct air compatible
- Preheated airwash system for clean glass
- Externally controlled riddling grate - from either side
- Rear heat shield for closer positioning to combustibles
- Height adjusting legs as standard
- Choice of standard detachable handle or optional detachable wooden handle

Optional Extras: Wooden safety handle / Stand / Log store / Pedestal / Floor fixing kit



Farrington Small Eco

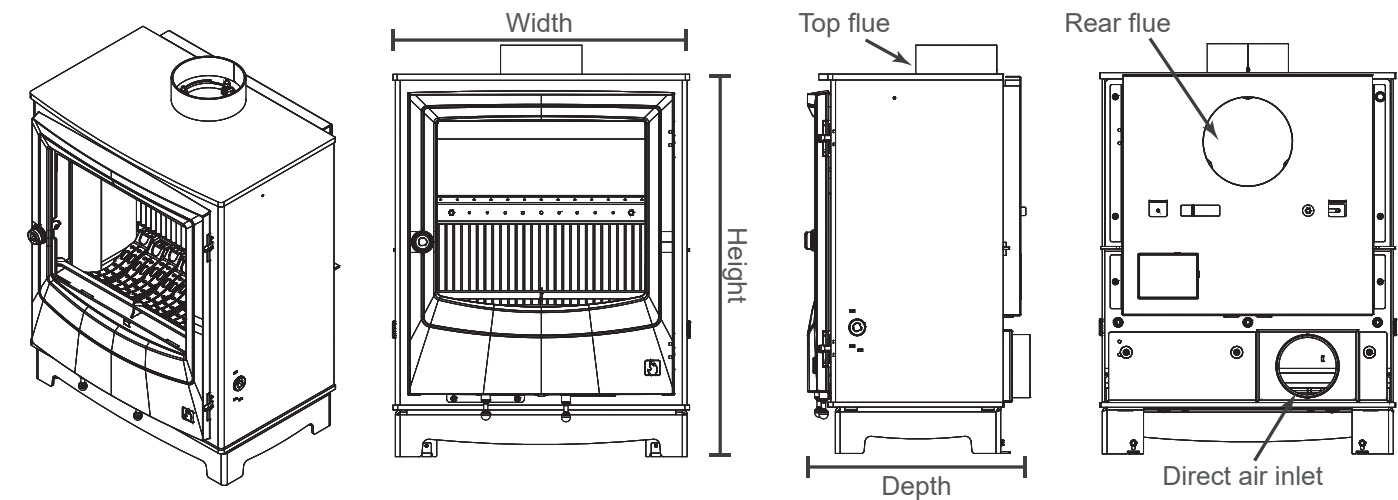

Dimensions

Width (across canopy)	495 mm
Height (on standard fitted feet)	638 mm
Depth (including handle boss)	362 mm
Height of stand	130 mm
Height of pedestal	253 mm
Height of log store	310 mm
Total height on stand	768 mm
Total height on pedestal	891 mm
Total height on log store	948 mm
Flue diameter	127 mm
Depth from back to centre of top flue	108.5 mm
Height to centre of rear flue	522.5 mm
Ideal log length	360 mm

Performance	Wood Fuel	Solid Fuel
Energy Efficiency Class	A	D
Nett Efficiency	77.8 %	82.4 %
Nominal Output	5 kW	4.9 kW
Output Range	4 - 6.2 kW	
Mean Co Emission (@13% O2)	0.11 %	0.06 %
Mean CO2 Emission	9.5 %	11.6 %
DIN+ particulate	13 Nmg/m3	5 Nmg/m3
Mean NOx Emission (@13% O2)	79 Nmg/m3	79 Nmg/m3
Mean OGC Emission (@13% O2)	92 Nmg/m3	5 Nmg/m3
Flue Gas Mass Flow	5.1 g/s	3.5 g/s
Flue Gas Temperature	261 °C	272 °C
Typical fuel load to achieve rated nominal heat output/hr	1.11 kWh/kg (seasoned hardwood)	0.71 kWh/kg (MSF Maxibrite)

Features

Stove body type	Freestanding
Ecodesign Ready	Yes
Suitable for smoke control areas	Yes
Suitable for direct air connection	Yes
Suitable for non-combustible 12mm hearth	Yes
Weight gross (packed kg)	107 Kg
Weight nett (unpacked kg)	102 Kg

Minimum distance to combustibles

Single Walled Flue, without Rear Heat Shield fitted	
Rear	300 mm
Side	500 mm
Max hearth temp	43 °C
Twin Walled Flue with Rear Heat Shield fitted	
Rear	250 mm
Side	400 mm
Max hearth temp	43 °C

Direct air spigot location

(when viewing the rear side of the stove)	
Distance from right hand side to centre	143 mm
Distance from floor to centre	155 mm

This appliance must be installed with clearance of 100mm to non-combustible materials. We recommend clearance of 450mm to combustible beams above the stove. Installation and operating instructions for this stove are available online at www.aradastoves.com.