

Hoxton 7



Hoxton 7

Achieve effortless style with this versatile Hoxton 7 kW wood burning ecodesign stove. This cylindrical body stove with its huge curved glass door will create a visual statement in any home. For added style and practicality the Hoxton can be paired with the pedestal or log store accessories, both available in short or tall configurations.

Hoxton has excellent fuel efficiency and low emissions meeting approval of the clearSkies scheme.

Features

- Ecodesign Ready
- Lifetime guarantee
- Simple, discreet air controls
- Top or rear 5" flue outlet
- Direct air compatible
- Approved for use in Smoke Control Areas
- Log store and pedestal accessories available
- Click-close door latch
- Available in other colour options

Dimensions

Width	545 mm
Height	771 mm
Depth	425 mm
Ideal log length / diameter	250 / 100 mm



Hoxton with optional tall pedestal accessory



Hoxton with optional tall log store accessory



Convenient, tidy storage (short log store shown)




Curved glass door with click-close door latch

Optional Extras: Matt Black Handle / Short or Tall Log store / Short or Tall Pedestal



Hoxton 7

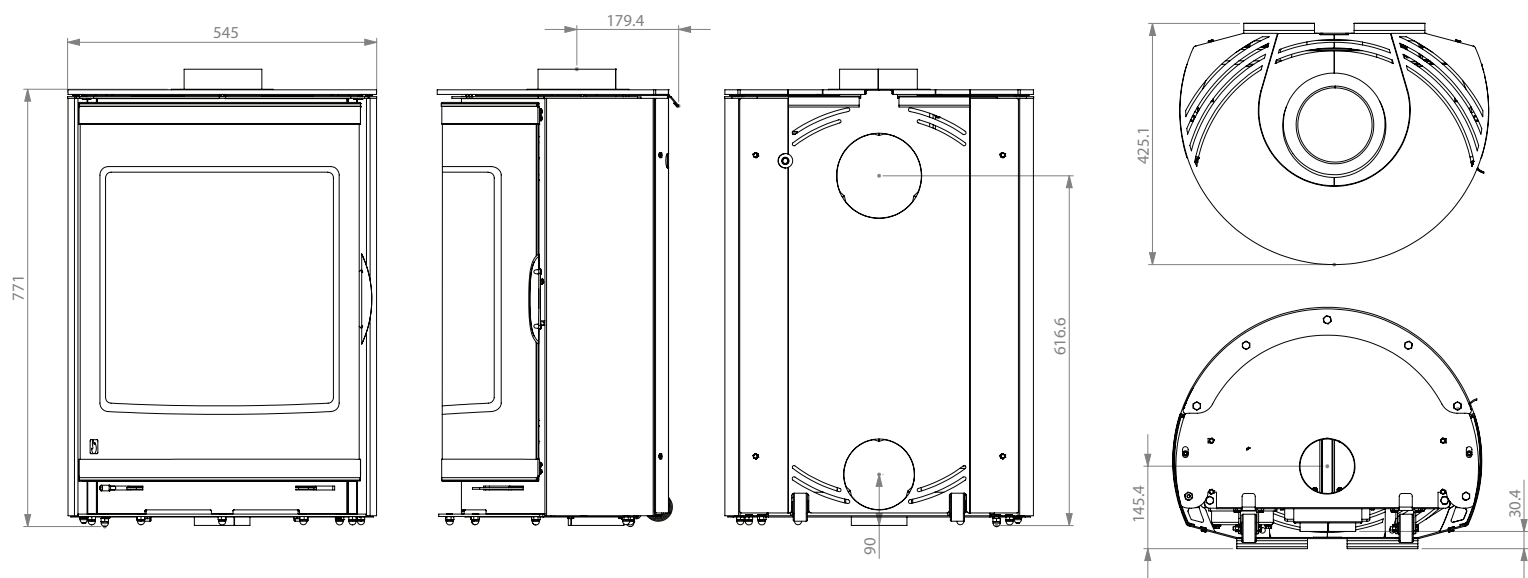

Dimensions

Width (across footprint)	545 mm
Height (top of canopy to base)	771 mm
Short log store height / total height	219 mm / 990 mm
Tall log store height / total height	312 mm / 1083 mm
Short pedestal height / total height	206 mm / 977 mm
Tall pedestal height / total height	312 mm / 1083 mm
Depth	425 mm
Flue Diameter	127 mm
Depth from back to centre of top flue	180 mm
Axis height of rear flue	617 mm
Ideal log length / diameter	250 mm / 100 mm

Performance

	Wood Fuel
Energy Efficiency Class	A
Nett Efficiency	78.6 %
Nominal Output	7.3 Kw
Mean Co Emission (@13% O2)	0.1%
DIN+ particulate	34 Nmg/m3
Mean NOx Emission (@13% O2)	85 Nmg/m3
Mean OGC Emission (@13% O2)	80 Nmg/m3
Flue Gas Mass Flow	5.6 g/s
Flue Gas Temperature	313 °C
Nominal output/hr (typical fuel load)	2.04 kWh/Kg (seasoned hardwood)

Features

Stove body type	Freestanding
Ecodesign Ready	Yes
Approved for smoke control areas	Yes
Suitable for direct air connection	Yes
Suitable for non-combustible 12mm hearth	Yes
Weight nett (unpacked kg)	113 Kg

Minimum distance to combustibles

	With single-walled flue fitted
Rear	250 mm
Side	500 mm
	With twin-walled flue fitted
Rear	200 mm
Side	500 mm
Max hearth temperature	32 °C

Direct air spigot location

(when viewing the rear side of the stove)

Spigot diameter	100 mm
Height from floor (standard feet)	90 mm
Axis distance from rear (from underneath)	146 mm
Lateral position	Centre

This appliance must be installed with clearance of 100mm to non-combustible materials. We recommend clearance of 500mm to combustible beams above the stove. Installation and operating instructions for this stove are available online at www.aradastoves.com.